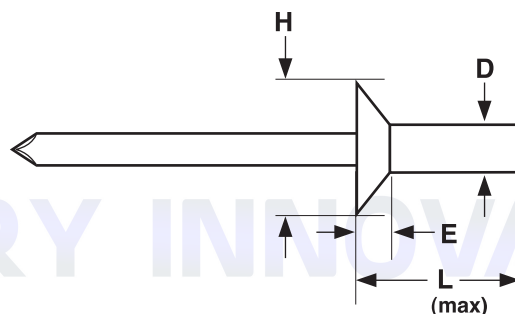


**Aluminum Rivet  
Steel Mandrel**
**BLIND, COUNTERSUNK, CLOSED-END**


CLOSED-END, COUNTERSUNK, ALUMINUM BODY/STEEL MANDREL BLIND RIVETS										IFI-126		
Part Number	D		Hole Size	Drill Number	Grip Range	L		H		E	Ultimate Shear Load	Ultimate Tensile Load
	Rivet Body Diameter					Length	Head Diameter		Head Height			
	Max	Min					Inches	Max		Min		
ACSC42	.128	.122	.129 - .133	#30	.063 - .125	.360	.245	.221	.042	240	280	
ACSC43	.128	.122	.129 - .133	#30	.126 - .187	.422	.245	.221	.042	240	280	
ACSC44	.128	.122	.129 - .133	#30	.188 - .250	.485	.245	.221	.042	240	280	
ACSC64	.191	.183	.192 - .196	#11	.188 - .250	.531	.394	.356	.060	500	690	

<b>Description</b>	An aluminum blind fastener with a self-contained steel mandrel whose mandrel head is completely protected and secured within the closed end of the rivet. The head of the rivet body is countersunk at an angle of 120°.
<b>Applications/ Advantages</b>	Closed-end rivets are used where the adjoining back-plate cannot be accessed but must be kept weatherproof. The installed rivet forms a tight seal preventing seepage of liquid or gas through the fastener assembly. The countersunk head style provides a smooth offside surface and sufficient clearance for moving parts which pass over the rivet head. They are preferred in many electronics applications because there is no chance of the mandrel falling into the work area on the blind side. Closed-end rivets provide greater tensile and shear strength than similar-sized open end rivets. They should be used when fastening materials with mechanical and physical properties similar to aluminum.
<b>Material</b>	<i>Rivet Body:</i> Aluminum alloy 5056 or equivalent <i>Mandrel:</i> Carbon steel
<b>Shear Strength</b>	Rivets shall have ultimate shear loads not less than the minimum ultimate shear loads specified in the above table.
<b>Tensile Strength</b>	Rivets shall have ultimate tensile loads not less than the minimum ultimate tensile loads specified in the above table.

PART NUMBER COMPARISON - CLOSED-END ALUMINUM RIVET/STEEL MANDREL COUNTERSUNK							
Catalog Part Number	Huck/Auto-matic	Pop®	Marson/Creative	Star	Celus®	Cherry	Gesipa®
ACSC42	-	AK42H	-	-	-	-	-
ACSC43	-	AK43H	-	-	-	-	-
ACSC44	-	AK44H	-	-	-	-	-
ACSC64	-	AK64H	-	-	-	-	-

Celus® is a registered trademark of Gesipa Blindniettechnik Gesellschaft Mit Beschränkter Haftung, Gesellschaft Fur Internationale Patentverwertung M.B.H.-Gesipa.  
Gesipa® is a registered trademark of Gesipa Fasteners USA, Inc.