


Coarse Thread, Phillips  
& Square Recess

DRYWALL & DECK SCREWS

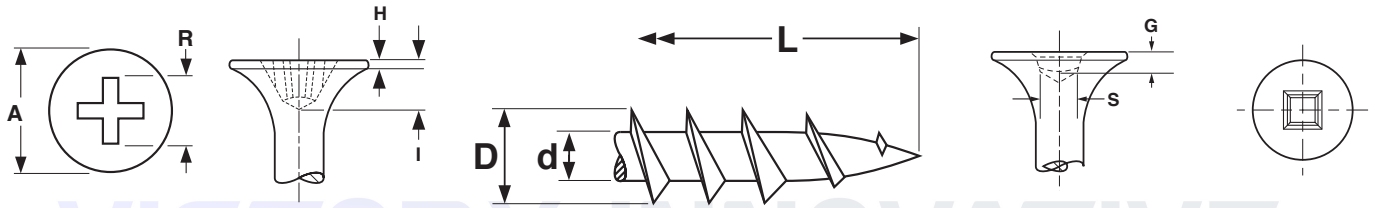

SQUARE RECESS COARSE THREAD DECK SCREWS

| Screw Size                                                                                                                               | Threads per inch | D              |                               | S             |      | G                        |      | Drive Size |
|------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------|-------------------------------|---------------|------|--------------------------|------|------------|
|                                                                                                                                          |                  | Major Diameter |                               | Recess Square |      | Penetration Gaging Depth |      |            |
|                                                                                                                                          |                  | Max.           | Min.                          | Max           | Min  | Max                      | Min  |            |
| 6                                                                                                                                        | 10               | .154           | .142                          | .091          | .089 | .065                     | .056 | 1          |
| 8                                                                                                                                        | 8                | .180           | .163                          | .113          | .110 | .075                     | .064 | 2          |
| 10                                                                                                                                       | 8                | .210           | .180                          | .113          | .110 | .075                     | .064 | 2          |
|                                                                                                                                          |                  |                |                               |               |      |                          |      |            |
| Tolerance on Length                                                                                                                      |                  |                | Up to 1 in. incl.: -0, +0.060 |               |      | Over 1 in.: -0, +0.100   |      |            |
| In the absence of a single industry standard for Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable. |                  |                |                               |               |      |                          |      |            |

PHILLIPS RECESS COARSE THREAD DECK SCREWS

| Screw Size                                                                                                                               | Threads per inch | D                             |      | R                        |      | I                      | Phillips Recess Depth |
|------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------|------|--------------------------|------|------------------------|-----------------------|
|                                                                                                                                          |                  | Major Diameter                |      | Phillips Recess Diameter |      | Phillips Recess Depth  |                       |
|                                                                                                                                          |                  | Max.                          | Min. | Max.                     | Min. | Ref                    |                       |
| 6                                                                                                                                        | 8 to 10          | .158                          | .142 | .201                     | .176 | .106                   | 2                     |
| 7                                                                                                                                        | 8 to 10          | .169                          | .153 | .201                     | .176 | .118                   | 2                     |
| 8                                                                                                                                        | 8 to 10          | .187                          | .170 | .201                     | .176 | .124                   | 2                     |
| 9                                                                                                                                        | 8                | .195                          | .180 | .201                     | .176 | .124                   | 2                     |
| 10                                                                                                                                       | 8                | .211                          | .192 | .204                     | .190 | .124                   | 2                     |
| 12                                                                                                                                       | 8                | .239                          | .212 | .265                     | .250 | .144                   | 3                     |
| 1/4                                                                                                                                      | 8                | .270                          | .240 | .277                     | .260 | .160                   | 3                     |
| Tolerance on Length                                                                                                                      |                  |                               |      |                          |      |                        |                       |
| Tolerance on Length                                                                                                                      |                  | Up to 1 in. incl.: -0, +0.060 |      |                          |      | Over 1 in.: -0, +0.100 |                       |
| In the absence of a single industry standard for Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable. |                  |                               |      |                          |      |                        |                       |

NOTE: There is no single standard for deck screw dimensions. These values are offered as a guide; deviations from these specifications may occur.

| Description              | Steel                                                                                                                                                                                                                                                                                               | Stainless                                                                                                                                                                |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | A bugle head screw with spaced threads, extra sharp point and dactrotized finish.                                                                                                                                                                                                                   | A bugle head screw with spaced threads and extra sharp point, manufactured of corrosion-resistant stainless steel.                                                       |
| Applications/ Advantages | Designed specifically for joining pieces of pressure treated lumber. Provides corrosion resistance superior to phosphate-coated drywall screws without discoloring the wood. The square drive recess is preferred by some for its excellent torque transmission and resistance to cam-out problems. | Designed specifically for joining pieces of pressure treated lumber. Remains resistant to corrosion for approximately twice as long as do dactrotized steel deck screws. |
| Material                 | AISI 1018 or equivalent steel                                                                                                                                                                                                                                                                       | 18-8 passivated stainless steel                                                                                                                                          |
| Hardness                 | HV 550 - 800                                                                                                                                                                                                                                                                                        | Rockwell B 85 - 95                                                                                                                                                       |
| Plating                  | Steel deck screws have a dactrotized finish.                                                                                                                                                                                                                                                        | Stainless deck screws require no additional coating.                                                                                                                     |