


DECK SCREWS W/TYPE-17 POINT **Bugle Head
Square Recess**

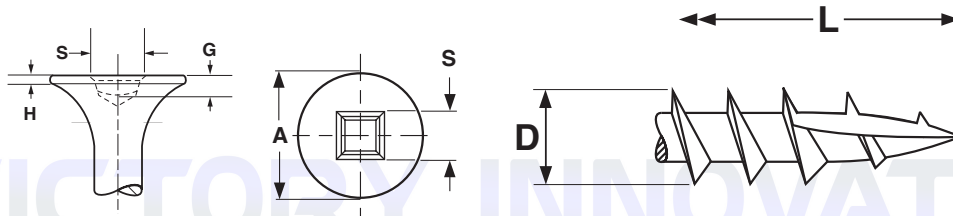

VICTORY INNOVATIVE
FASTENERS
YOUR GLOBAL FASTENER SOURCE

BUGLE HEAD TYPE-17 DECK SCREWS												
Nominal Size	Threads per Inch	D		A		H		S		G		Square Recess Driver Size
		Major Diameter		Head Diameter		Head Thickness		Square Recess Drive				
		Max	Min	Max	Min	Max	Min	Recess Square		Depth		
								Max	Min	Max	Min	
6	8 to 10	.158	.142	.347	.315	.031	.020	106	.090	.071	.055	1
8	8 to 10	.187	.170	.363	.315	.039	.020	.113	.110	.075	.064	2
10	8	.211	.192	.363	.334	.039	.020	.113	.110	.075	.064	2
12	8	.239	.212	.435	.390	.055	.042	.135	.131	.115	.105	3
1/4	8	.270	.240	.472	.450	.058	.047	.135	.131	.115	.105	3
Tolerance on Length		Up to 1" Incl.						Over 1"				
		-0, +0.060						-0, +0.100				
In the absence of a single industry standard for Bugle Head Deck Screws, these dimensions are offered as a guide; slight deviations are acceptable.												

VICTORY INNOVATIVE
FASTENERS
YOUR GLOBAL FASTENER SOURCE

Description	A countersunk head screw with a flat top surface, a concave underhead bearing surface with spaced threads. The final 2 to 3 threads taper to an extra sharp point with a chip cavity cut out of approximately 25% of that tapered section.
Applications/ Advantages	Designed specifically for joining pieces of pressure treated lumber. Remains resistant to corrosion for approximately twice as long as do dactrotized steel deck screws. The chip cavity assists in the driving process
Material	18-8 stainless steel (approximately)
Hardness	Rockwell B 85 - 95
Plating	Stainless deck screws require no additional coating.