

HEAD DIMENSIONS

Wafer: Phillips & Square Recess

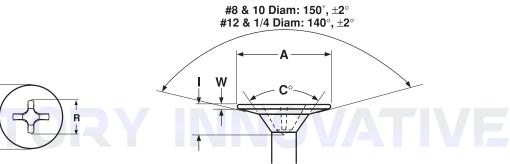

WAFER PHILLIPS HEAD FOR SELF-DRILLING SCREWS											
Nominal Size	A —		R		I		W		Bottom Countersink Angle	Phillips Driver Size	
	Head Diameter		Recess Diameter		Recess Depth		Wafer Thickness				
	Max.	Min.	Max	Min	Max	Min	Max	Min	± 2°	CE	
8	.380	.359	.189	.176	.110	.086	.035	.025	50°	2	
10	.516	.441	.204	.190	.124	.101	.040	.031	60°	2	
12	.552	.511	.268	.254	.139	.115	.040	.031	70°	3	
1/4	.620	.580	.282	.267	.160		.042	.033	70°	3	

NOTE: There is no single standard for Wafer head dimensions. These values are offered as a guide; deviations from these specifications may occur

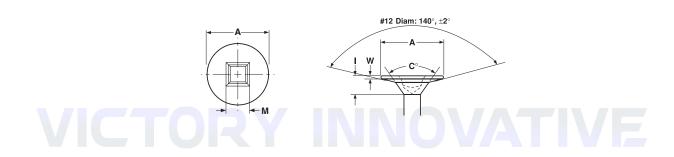


Wafer Square Recess Head for Self-Drilling Screws											
Nominal Size	A		M	1		W		С	Driver Size		
	Head Diameter		Recess Width	Recess Depth		Wafer Thickness		Bottom Countersink Angle			
	Max.	Min.	Ref	Max	Min	Max	Min	± 2°			
12	.551	.512	.133	.095	.080	.039	.031	70°	3		

NOTE: There is no single standard for Wafer head dimensions. These values are offered as a guide; deviations from these specifications may occur


Wafer: Six-Lobe & Combo Square-Phillips

HEAD DIMENSIONS

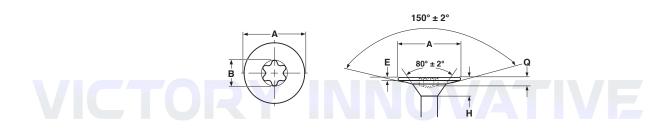

Wafer Six-Lobe Head for Self-Drilling Screws										
Nominal Size	А		В	н	w					
	Head Diameter		Recess Diameter	Total Head Height	Water Thic		Six-Lobe Recess Size			
	Max.	Min.	Ref	Max	Max	Min				
10	.516	.441	.155	.095	.039	.031	3			

NOTE: There is no single standard for Wafer head dimensions. These values are offered as a guide; deviations from these specifications may occur

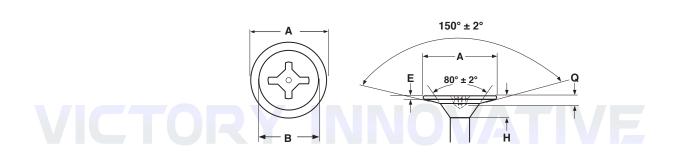

WAFER SQUARE-PHILLIPS COMBO HEAD FOR SELF-DRILLING SCREWS											
	А		E	3	н	W					
Nominal Size	Head Diameter		Recess Penetration Depth		Total Head Height	Wafer Thickness		Six-Lobe Recess Size			
	Max.	Min.	Max.	Min.	Max	Max	Min				
10	.515	.440	.076	.064	.157	.040	.030	3			

NOTE: There is no single standard for Wafer head dimensions. These values are offered as a guide; deviations from these specifications may occur