
## STANDARD FLAT

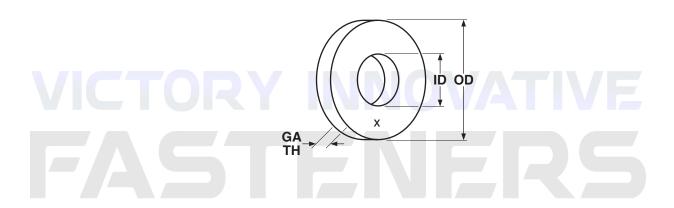

COMMERCIAL FLAT WASHERS - 316 STAINLESS STEEL						
Size	OD		ID		TH	
	Outside Diameter		Inside Diameter		Thickness	
	Max	Min	Max	Min	Max	Min
1/4	.630	.620	.286	.276	.055	.045
1/4	.693	.683	.286	.276	.055	.045
5/16	.755	.745	.348	.338	.055	.045
3/8	.880	.870	.411	.401	.055	.045
3/8	1.005	.995	.411	.401	.055	.045
5/8	1.255	1.245	.692	.682	.089	.069
5/8	1.505	1.495	.692	.682	.089	.069
3/4	1.755	1.745	.817	.807	.083	.073
7/8	2.255	2.245	.943	.933	.117	.101
1	2.005	1.995	1.067	1.057	.133	.117
1	2.505	2.495	1.067	1.057	.133	.106

## YOUR GLOBAL FASTENER SOURCE

Advantages Material	316 stainless steel		
Applications/	Designed for use with 316 stainless steel screws and nuts in general industrial applications where parts are subject to corrosion.		
Description	A thin, flat, circular stamping with a centrally located hole, made from a 316 austenitic stainless steel.		