


**Straight Barrel—  
3 Prong**

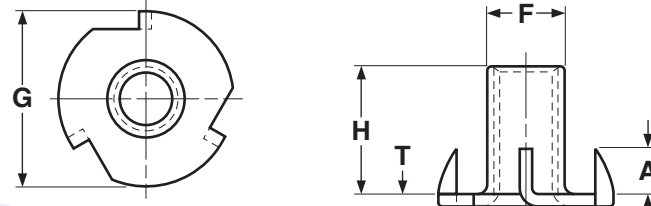

**3-PRONG**

**3-PRONG T-NUTS, STRAIGHT BARREL**


Part Number**	Thread Size	H	G	F	A	T	Drill Size	Part Number**	Thread Size	H	G	F	A	T	Drill Size
		Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)				Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)	
0402NT3	4-40	1/8	23/64	.130	3/32	.024	9/64	1406NT3	1/4-20	3/8	3/4	.305	1/4	.047	5/16
0404NT3	4-40	1/4	23/64	.141	3/32	.031	9/64	1407NT3	1/4-20	7/16	3/4	.305	5/16	.047	5/16
0604NT3	6-32	1/4	1/2	.188	1/8	.035	13/64	1408NT3	1/4-20	1/2	3/4	.305	7/32-1/4	.047	5/16
0804NT3	8-32	1/4	23/32	.208	7/32	.030	7/32	1409NT3	1/4-20	9/16	3/4	.305	7/32	.047	5/16
0805NT3	8-32	5/16	3/4	.208	1/4	.035	7/32	3105NT3	5/16-18	5/16	7/8	.360	9/32	.047	3/8
1004NT3	10-24	1/4	3/4	.243	5/32	.039	1/4	3106NT3	5/16-18	3/8	7/8	.390	1/4	.063	25/64
1005NT3	10-24	5/16	3/4	.243	7/32	.040	1/4	3107NT3	5/16-18	7/16	7/8	.390	1/4	.063	13/32
1007NT3	10-24	7/16	3/4	.243	5/16	.040	1/4	3108NT3	5/16-18	1/2	7/8	.360	1/4	.063	3/8
1105NT3	10-32	5/16	3/4	.243	7/32	.040	1/4	3110NT3	5/16-18	5/8	7/8	.390	5/16	.063	25/64
1106NT3	10-32	3/8	3/4	.243	1/4	.040	1/4	3705NT3	3/8-16	5/16	1	.420	9/32	.063	27/64
1107NT3	10-32	7/16	3/4	.243	5/16	.040	1/4	3707NT3	3/8-16	7/16	1	.440	11/32	.063	29/64
1404NT3	1/4-20	1/4	3/4	.305	3/16	.047	5/16	3710NT3	3/8-16	5/8	1	.440	9/32	.063	29/64
1405NT3	1/4-20	5/16	3/4	.305	7/32	.047	5/16								

\*\*Last digit of part number denotes number of prongs.

<b>Description</b>	Internally threaded barrel-shaped fasteners integrally formed with a flat base, which has prong-type projections extending perpendicular from the base aside the barrel.	
<b>Applications/ Advantages</b>	Used for fastening metal to products made of wood, particle board or plastic. The 3-prong style is used in harder materials to minimize splitting of the mating surface.	Used in similar applications, but when corrosion resistance is required.
<b>Material</b>	<b>Steel</b>	
	C1004-10 low-carbon steel.	<b>Stainless</b>
<b>Plating</b>	18-8 Stainless	
	See Appendix-A for plating information.	Parts are usually provided without additional finish.

NOTE: There is no single standard for T-nut dimensions. These values are offered as a guide; deviations from these specifications may occur.

**TEE** Straight Barrel—  
4 Prong

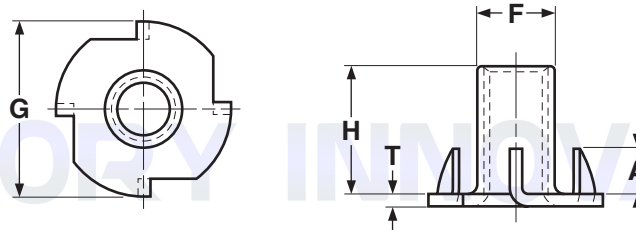

**4-PRONG**

T-NUTS, STRAIGHT BARREL																
Part Number**	Thread Size	H	G	F	A	T	Drill Size	Part Number**	Thread Size	H	G	F	A	T	Drill Size	
		Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)				Barrel Height (±1/32)	Flange Diam. (±1/32)	Barrel Diam. (±.015)	Prong Height (±1/32)	Material Thickness (±.015)		
0604NT4	6-32	1/4	1/2	.188	1/8	.035	13/64	1407NT4	1/4-20	7/16	3/4	.305	1/4	.047	5/16	
0804NT4	8-32	1/4	23/32	.208	3/16	.031	7/32	1408NT4	1/4-20	1/2	3/4	.305	7/32	.047	5/16	
0805NT4	8-32	5/16	3/4	.208	1/4	.035	7/32	1409NT4	1/4-20	9/16	3/4	.305	1/4	.047	5/16	
0806NT4	8-32	3/8	3/4	.208	1/4	.035	7/32	1410NT4	1/4-20	5/8	3/4	.306	1/4	.047	5/16	
0807NT4	8-32	7/16	3/4	.208	1/4	.035	7/32	3105NT4	5/16-18	5/16	7/8	.360	9/32	.047	3/8	
1005NT4	10-24	5/16	3/4	.243	7/32	.040	1/4	3106NT4	5/16-18	3/8	7/8	.390	1/4	.063	25/64	
1007NT4	10-24	7/16	23/32	.243	7/32	.040	1/4	3107NT4	5/16-18	7/16	7/8	.360	1/4	.047	3/8	
1105NT4	10-32	5/16	3/4	.243	7/32	.040	1/4	3108NT4	5/16-18	1/2	7/8	.390	1/4	.063	13/32	
1106NT4	10-32	3/8	3/4	.243	1/4	.043	1/4	3110NT4	5/16-18	5/8	7/8	.375-.390	1/4-5/16	.060-.063	3/8, 25/64	
1107NT4	10-32	7/16	3/4	.243	7/32	.043	1/4	3705NT4	3/8-16	5/16	1	.440	9/32	.063	27/64	
1404NT4	1/4-20	1/4	3/4	.305	7/32	.047	5/16	3707NT4	3/8-16	7/16	1	.440	11/32	.063	29/64	
1405NT4	1/4-20	5/16	3/4	.305	7/32	.047	5/16	3710NT4	3/8-16	5/8	1	.440	5/16	.063	29/64	
1406NT4	1/4-20	3/8	3/4	.305	7/32	.047	5/16									

\*\*Last digit of part number denotes number of prongs.

<b>Description</b>	Internally threaded barrel-shaped fasteners integrally formed with a flat base, which has prong-type projections extending perpendicular from the base aside the barrel.	
<b>Applications/ Advantages</b>	Used for fastening metal to products made of wood, particle board or plastic. Four prong tee-nuts can be used in hard or soft woods.	Used in similar applications, but when corrosion resistance is required.
<b>Material</b>	<b>Steel</b>	<b>Stainless</b>
	C1004-10 low-carbon steel.	18-8 Stainless
<b>Plating</b>	See Appendix-A for plating information.	Parts are usually provided without additional finish.

NOTE: There is no single standard for T-nut dimensions. These values are offered as a guide; deviations from these specifications may occur.